

## Technical Scene

# Benefits of Automating Shear in Starch Cooking

## Maintaining Optimal Pressure Drop Increases Ethanol Yield

*This article is based on a presentation by Jim Zaiser, vice president of engineering and operations, Hydro-Thermal Corp., Waukesha, WI (800-952-0121). Zaiser spoke at the International Fuel Ethanol Workshop and Expo, June 20-23, 2006.*

### Jetcooker

The Jetcooker™ is a critical component, and the first step, of the liquefaction process in ethanol production. It is generally located after the slurry tank, where a slurry of corn mash, water, and enzymes is formed. A pump feeds that slurry into the Jetcooker, where it is mixed with steam. Heating the mash in the Jetcooker is the first step to opening the starch molecules so the enzymes can break it down into sugar.

Maintaining a constant pressure drop across the Jetcooker will optimize shear, mixing characteristics, and overall perfor-

mance efficiency. Adjustments can be made to maintain the optimal pressure drop during operation even as process conditions change. This is done by adjusting the size of the gap between the combining tube and nozzle (See Illustration 1 on this page).

As the gap is widened or opened, the pressure drop is decreased (lower shear). As the gap is narrowed or closed, the pressure drop is increased (higher shear).

Adjusting the size of the gap can be done by turning the drive nut, which rotates the drive shaft, moving the combining tube stud and combining tube laterally.

**Automation.** Automation controls also can be added which automatically adjusts the position of the combining tube as needed to maintain the desired pressure drop.

The control panel receives signals representing differential pressure setpoints and signals from pressure transmitters in the slurry inlet and discharge. Pressure measurements are compared to the target setpoints and signals are sent to the pneumatic package to adjust the combining tube position.

**Optimum position.** If the gap between the combining tube and nozzle is too large, there is low shear and low pressure drop. This results in incomplete starch conversion, which is a loss of efficiency.


If the gap is too small, there is high shear and excessive pressure drop. The result is excessive wear to the internals of the Jetcooker and increased pumping cost. See Illustration 2.

The target for this study was to approach the theoretical maximum yield. By optimizing the combining tube position, the plant was able to more closely reach this maximum (See Illustration 3). The optimal differential pressure, and therefore opening size, is going to be different for each ethanol plant. Many factors will come into play such as incoming viscosity, flow rate, combining tube diameter, size of the Jetcooker, temperature, and slurry make-up conditions. An optimal combining tube position can be established by testing for the minimal pressure drop, which produces optimal starch hydrolysis.

### Golden Triangle Experience

Ron Bennett, maintenance manager at Golden Triangle, Craig, MO, shared the plant's experience with automating its Jetcooker. Bennett outlined the typical parameters of its ethanol production process:

- Starch levels of corn measuring about 72%.
- Corn grind steady at 500 to 600 microns.

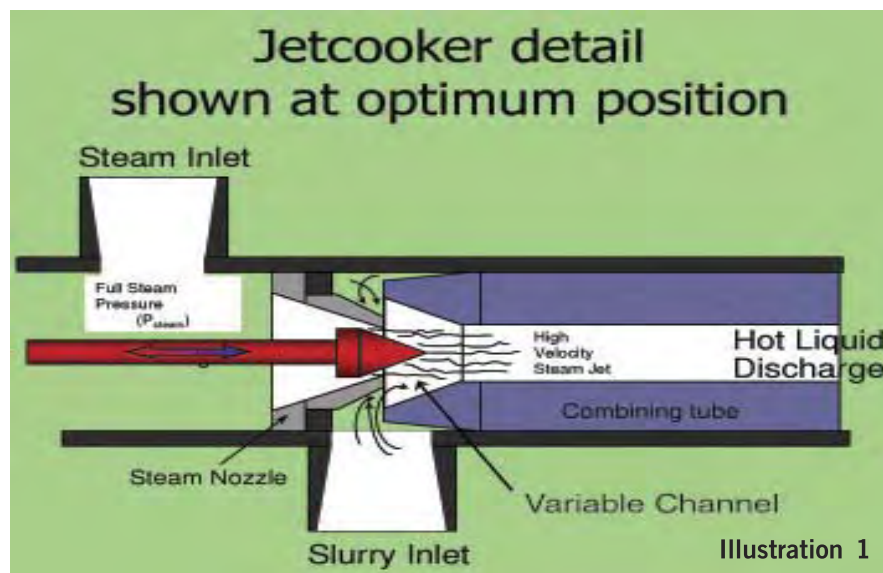

- Fermenter temperature target is 90 degrees F.

Several process variations at the plant justified automating the jet cooker including:

- Slurry tank has varying input flows and therefore resultant temperatures.
- Target flow rate varies by 5%.
- Pre-gelatinization of starch caused by varying temperatures and tank pre-heating methods.
- Dough balls: inconsistent agitation. Size ranged from BB to very large clusters.

To determine the optimal pressure drop for the Golden Triangle, the plant started with 30 psi. This required de-bottlenecking.

Bennett said he couldn't achieve that pressure drop and he didn't want to change pump sizes. The solution was to remove pressure drops in other parts of the process. This was done by removing a restrictive valve and installing a valve on a pump ahead of the jet cooker.

The differential pressure drop was increased in 5 psi increments. Sugar and alcohol concentrations were measured and relative sugar and alcohol contents were evaluated via kinetics curve.

**Benefits.** At 42 psi, there were some fermentable sugars left over. The enzyme dosage was changed to convert the sugars to alcohol. Optimizing the shear point

resulted in a 1% gain in alcohol volume or a 5% increase in alcohol production.

To put that into context, consider theoretical yields which say it is possible to achieve 93% yield. Realistic production results are more commonly achieving 85% to 90%. Optimizing its shear point allowed Golden Triangle to reach a 90.5% efficiency.

Simply put, the plant was able to produce more gallons of ethanol with the same amount of corn and other inputs.

There is a certain point where the maximum efficiency is achieved. A plant needs enough differential pressure but there's no benefit in having too much.

### Why it Happens


If the gap between the combining tube and nozzle is too big, the starch stream is too thick for the steam to penetrate. Penetration of the starch is only 50% to 75%.

When the gap is narrowed, the velocity is increased to a point where the starch stream is thinner and therefore the steam can penetrate 100%. This allows for instantaneous and efficient way of mixing steam and the starch molecules resulting in instant hydrolysis.

Secondly, pre-gelatinized starch particles are mechanically broken into smaller sizes by a properly adjusted combining tube. This results in complete starch conversion.

Illustration 3

## Golden Triangle Results

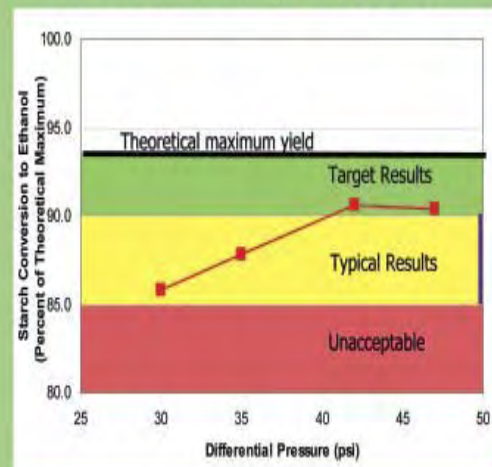


**Return on investment .** Golden Triangle initially saw a 5% increase in sugar conversion. The continual optimization of automation is estimated to be a minimum of 1% increased efficiency.


Total cost of jet cooker automation is about \$50,000. A 1% production increase for a 20-million-gallon-per-year ethanol plant is worth \$400,000 (with ethanol selling at \$2 per gallon). That means a plant could recoup the investment cost of the automation in two or three months.

-End-

## Combining Tube Adjustment: Shown at incorrect positions



**Gap too large:** low shear and low pressure drop. Result is incomplete starch conversion.



**Gap too small:** high shear, excessive pressure drop. Result is excessive wear and increased pumping cost.

Illustration 2

### About Hydro-Thermal Corporation

The leader in DSI for over 70 years, Hydro-Thermal has a strong legacy in first generation biofuels, with Jetcooker heaters in over 125 ethanol plants worldwide. This knowledge has been successfully leveraged to second generation biofuels. Let Hydro-Thermal apply this expertise to your cellulose project.

**hydro THERMAL**

WE BRING THE HEAT.

Hydro-Thermal Corporation  
400 Pilot Court  
Waukesha, WI 53188 U.S.A.  
800-952-0121 262-548-8900  
www.hydro-thermal.com  
info@hydro-thermal.com

