


SLURRY TANK HEATING

Disadvantages of the Current Heating System

Although using steam sparging nozzles for slurry tank heating is the current industry standard, many issues are associated with this heating method that can drastically impede the starch conversion process.

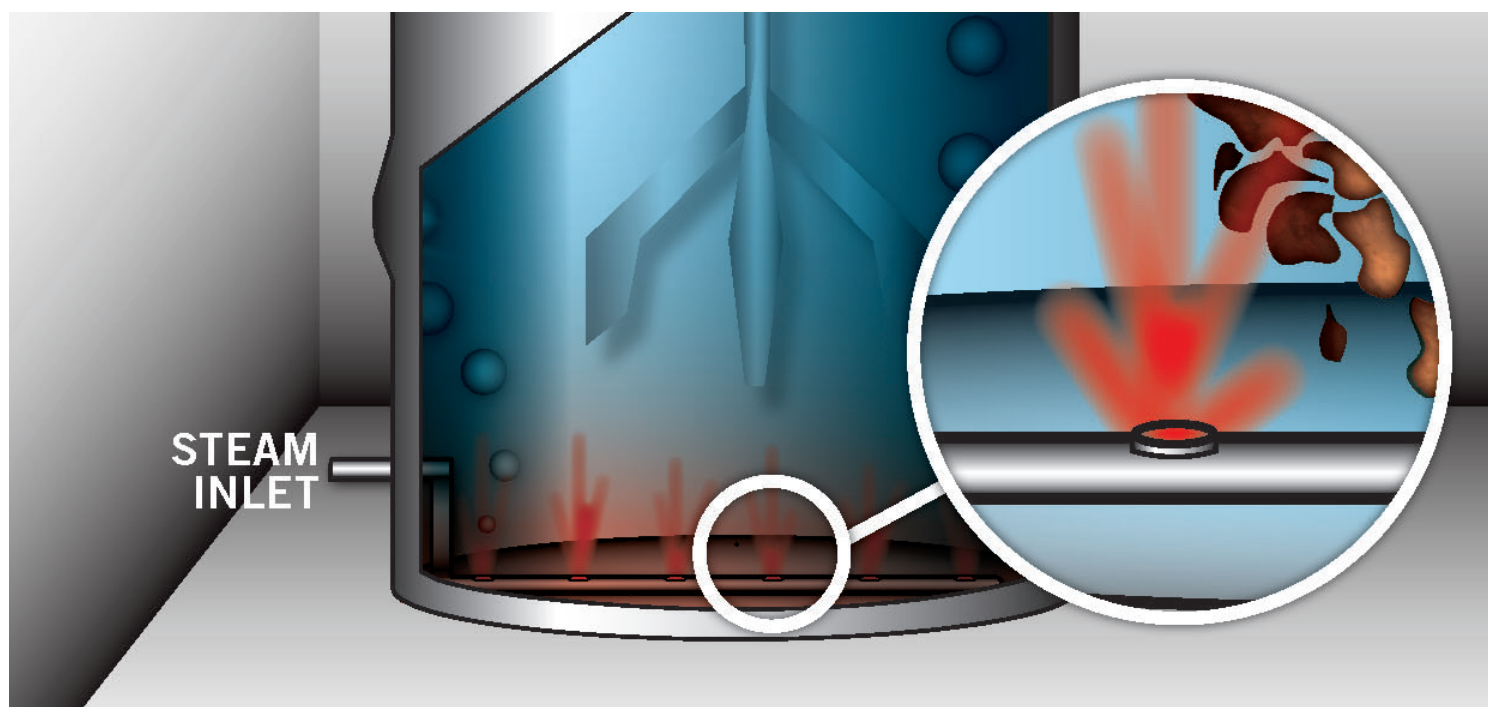

Retrograded Starch and Denatured Enzymes

Steam temperatures in an average ethanol plant can get up to 350°F [177°C]. When both starch and enzymes come in contact with these temperatures, the results can be detrimental.

Poor Tank Temperature Control

By injecting all of the steam at the bottom, there is a risk of inconsistent temperature throughout the tank. A majority of the heat will be absorbed in the bottom, and much less heat will reach the surface. This causes enzymes to not be at optimal temperature during the retention time, and less starch will be broken down.

Cavitation

When steam is not mixed thoroughly, steam bubbles can collect and form into larger bubbles. When the large steam bubbles come in contact with the tank, they will rapidly condense. Cavitation will eat away the steel walls, and the tank will eventually start to leak. Damage to the tank from steam cavitation is widespread at most ethanol plants and can result in high maintenance costs, or in some cases, the need to replace the tank altogether.

Lack of Steam Condensation

Steam may not condense into the slurry and can go right through the tank up to the atmosphere. This increases energy costs since the energy used is being wasted.

SLURRY TANK HEATING

Advantages of Heating with a Hydroheater

Installing a Hydroheater on a recirculated loop around the tank can resolve all of the disadvantages of the current heating system and add the below advantages.

Higher Quality Starch Conversion

Although 350°F [177°C] steam is being injected into the product, the instantaneous condensation of the atomized steam bubbles prevents hot spots from occurring and results in a consistent 185°F [85°C] temperature directly at the Hydroheater discharge. This prevents the enzymes from being denatured and retrograded starch from forming. This results in better enzyme utilization and higher quality starch for conversion.

Accurate Temperature Control

When using a Hydroheater for slurry tank heating, all of the slurry will enter the tank at the correct temperature, and there will be minimal temperature stratification across the tank. This will allow the enzyme activity to be optimized for the full retention time required and result in higher starch conversion before the downstream Jetcooker.

Reduced Maintenance

Keeping all of the steam injection contained at one point will prevent damage to the tank from sparging. It will reduce the number of maintenance hours required for fixing the slurry tank.

Energy Savings


All of the steam will be condensed in the Hydroheater before it is discharged back into the slurry tank, and no steam will be lost in the atmosphere. This will reduce the amount of steam needed for the same temperature rise, and there will be lower fuel usage at the boiler.

Particle Size Reduction

The additional shear point added to the process will help reduce the particle size and break up “dough balls.” This will allow a larger surface area for enzyme contact for the full retention time, which will improve the starch conversion process.

Additional Slurry Tank Hydroheater System Offering

To continue improving upon our slurry tank Hydroheater design, we are offering an optional system upgrade. This offering includes installing two additional manual isolation valves and a single section of piping from the existing slurry pump to our new pump as part of the slurry Hydroheater project. This upgrade is focused on providing our customers with built-in system redundancy, improved reliability, and reduced front end downtime. This system upgrade will allow the plant to run through our pump while utilizing our heating system without process interruptions. This would be used in planned or unplanned outage events that require repairs to the primary slurry pump.

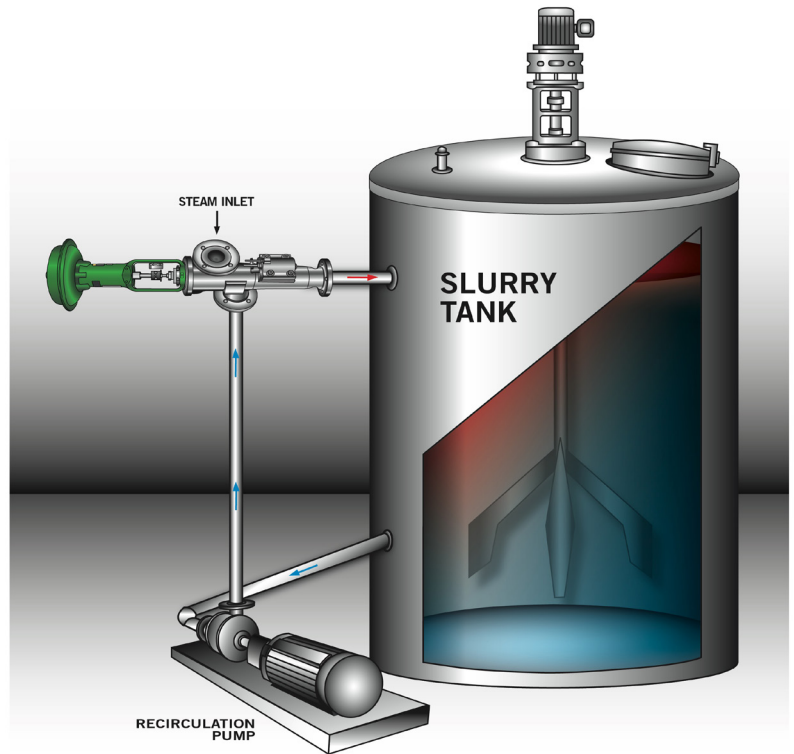

Need more information about Hydro-Thermal products?

Go to www.hydro-thermal.com or
contact us at info@hydro-thermal.com

400 Pilot Court | Waukesha, WI 53188
(262) 548-8900 | (800) 952-0121

HH-422 REV/C 2017